

**EC-PWM-A2-MPC1-\* PWM DRIVER****DESCRIPTION**

Microprocessor-based PWM electronic driver for remote control of a dual-coil proportional solenoid valve.

**OPERATION**

The EC-PWM-A2-MPC1 proportional valve driver supplies a double solenoid with a PWM (Pulse Width Modulated) current proportional to the input signal from a potentiometer, PLC or other control systems.

Proportional valve A is controlled with an input command signal varying from 2.5 to 4.5 V. Proportional valve B is controlled with an input command signal varying from 2.5 to 0.5 V. An auxiliary on-off type solenoid can be energised anytime the input signal goes out of the 2.25-2.75 V range.

**FEATURES**

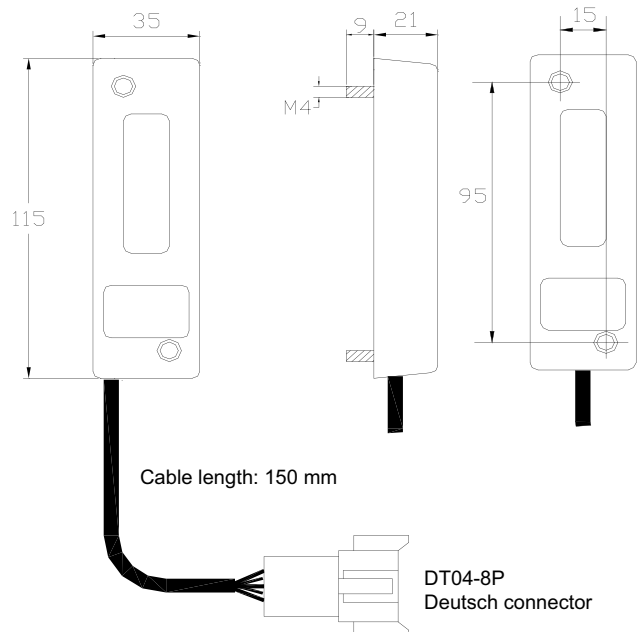
- The current in the solenoid is independent from any change in the coil resistance or in the supply voltage.
- The inherent superimposed dither frequency helps to overcome friction and stiction effects in the controlled device.
- Supply line is protected against reversed polarity.
- Input is protected against short circuits to GND and supply.
- Outputs are protected against short circuits, reversed polarity, over-current and over-temperature.
- The EC-PWM-A2 circuit is potted inside a plastic enclosure suitable for panel mounting by means of 2 set screws.
- Electro Magnetic Compatibility (EMC): EN 61000-6-2 (Immunity), EN 61000-6-3 (Emissions).

**SPECIFICATIONS**

Operating voltage:	8÷32 VDC
Max current consumption:	100 mA (no load applied)
Operating temperature:	-25°C / +85°C
Degree of protection:	IP 68
Input impedance:	40 kΩ
Analog input signals:	0.5 - 2.5 - 4.5 VDC
Typical ctrl pot resistance:	2÷10 kΩ
Current output range (PWM):	100÷1500 mA
Current on-off output:	max 1800 mA
PWM dither frequency:	100 Hz
Resolution:	10 bits
DT04-8P Deutsch connector (male contacts)	

**APPLICATIONS**

- 12 VDC and 24 VDC systems.
- Remote control of proportional valves.
- Field-adjustable applications.
- Control of a proportional bidirectional valve with a venting valve.

**DIMENSIONS**

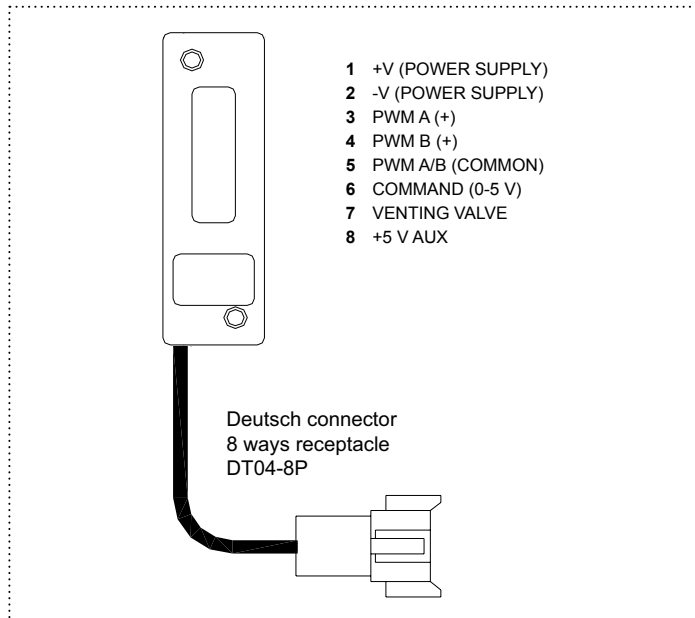
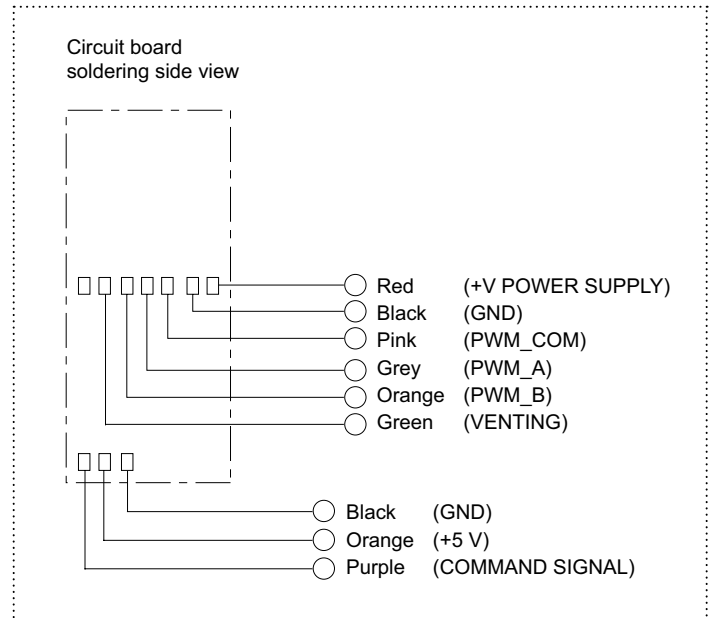
**WARNING:** the specifications/application data shown in our catalogs and data sheets are intended only as a general guide for the product described (herein). Any specific application should not be undertaken without independent study, evaluation, and testing for suitability.



4484 Boeing Drive Rockford, IL 61109 • USA • Phone +1 (815) 397-6628 • Fax +1 (815) 397-2526  
mail: delta@delta-power.com • [www.delta-power.com](http://www.delta-power.com)

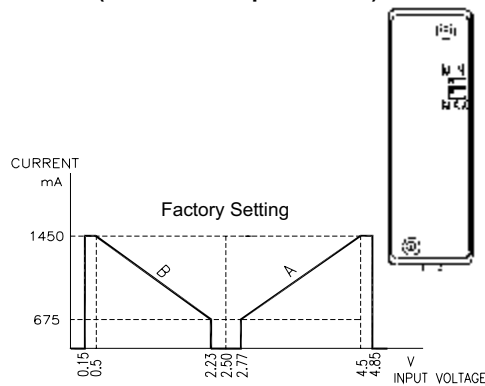
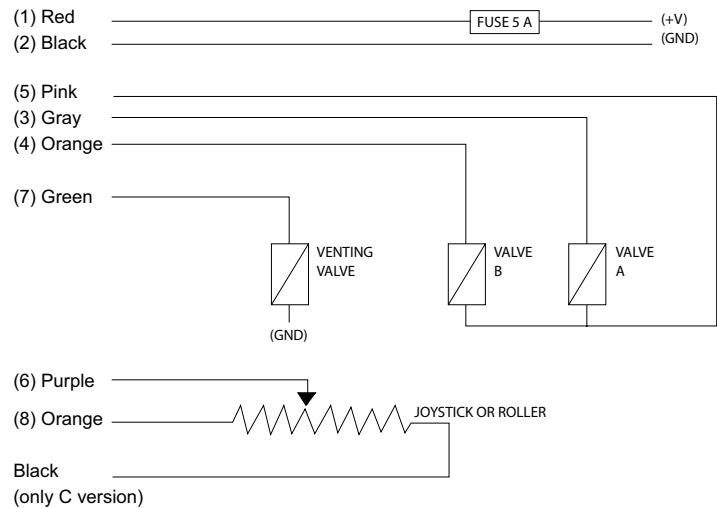
**TECNORD**

Via Malavolti, 36 • 41122 Modena • ITALY • Phone +39 (059) 254895 • Fax +39 (059) 253512  
mail: [tecnord@tecnord.com](mailto:tecnord@tecnord.com) • [www.tecnord.com](http://www.tecnord.com)

**EC-PWM-A2-MPC1-\* PWM DRIVER****H VERSION - PINOUT****C VERSION - WIRING DIAGRAM****ADJUSTMENTS**

Two rotary trimmers are located on the rear potted surface to provide the following field adjustments:

- **I<sub>min</sub>** (minimum output current)
- **I<sub>max</sub>** (maximum output current)

**APPLICATION EXAMPLE**

Proportional control of a dual coil valve from a bidirectional lever, joystick or roller.

**ORDERING INFORMATION****EC-PWM-A2-MPC1-\***

A = trimmer Adjustable version

H = potted plastic Housing

C = Circuit board only

Part numbers	Version
23.0409.138	H
23.0409.109	C

**WARNING:** the specifications/application data shown in our catalogs and data sheets are intended only as a general guide for the product described (herein). Any specific application should not be undertaken without independent study, evaluation, and testing for suitability.



4484 Boeing Drive Rockford, IL 61109 • USA • Phone +1 (815) 397-6628 • Fax +1 (815) 397-2526  
mail: delta@delta-power.com • [www.delta-power.com](http://www.delta-power.com)

**TECNORD**

Via Malavolti, 36 • 41122 Modena • ITALY • Phone +39 (059) 254895 • Fax +39 (059) 253512  
mail: [tecnord@tecnord.com](mailto:tecnord@tecnord.com) • [www.tecnord.com](http://www.tecnord.com)