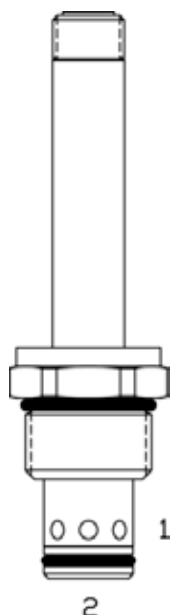


EE-PRD 2 WAY NORMALLY OPEN, PROPORTIONAL RELIEF VALVE

DESCRIPTION

10 size, 7/8-14 thread, "Delta" series, solenoid operated, 2 way normally open, hydraulic relief valve.

OPERATION

The EE-PRD blocks flow from (2) to (1) until sufficient pressure is present at (2) to offset the electrically induced solenoid force. Can be infinitely adjusted across a prescribed range using a variable electric input.

Pressure output is proportional to DC current input. This valve is intended for use as a pressure limiting device in demanding applications.

With no current applied to the solenoid, the valve will free flow from (2) to (1) at approximately 50 PSI.

Note: backpressure on port (1) becomes additive to the pressure setting at a 1:1 ratio.


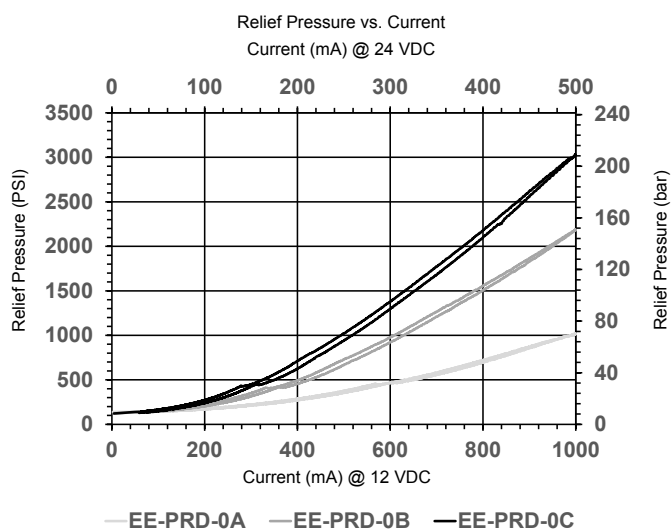
FEATURES

- Efficient wet-armature construction.
- Cartridges are voltage interchangeable.
- Industry common cavity.
- Unitized, molded coil design.
- Continuous duty rated solenoid.
- Optional coil voltages and terminations.

If low voltage is expected on the machine, 12 or 24 Volt systems will require the use of 10 volt or 20 volt coils respectively. Consult Factory for availability of these coil options.

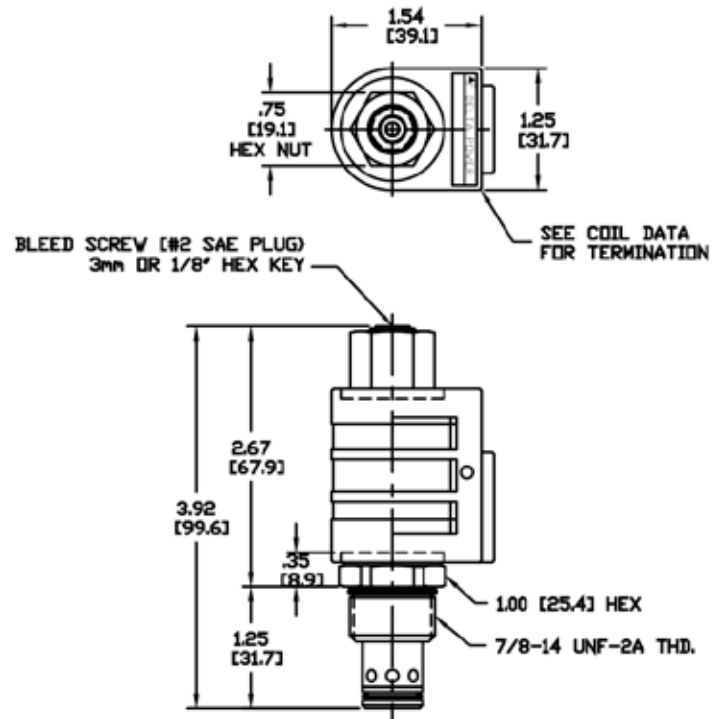
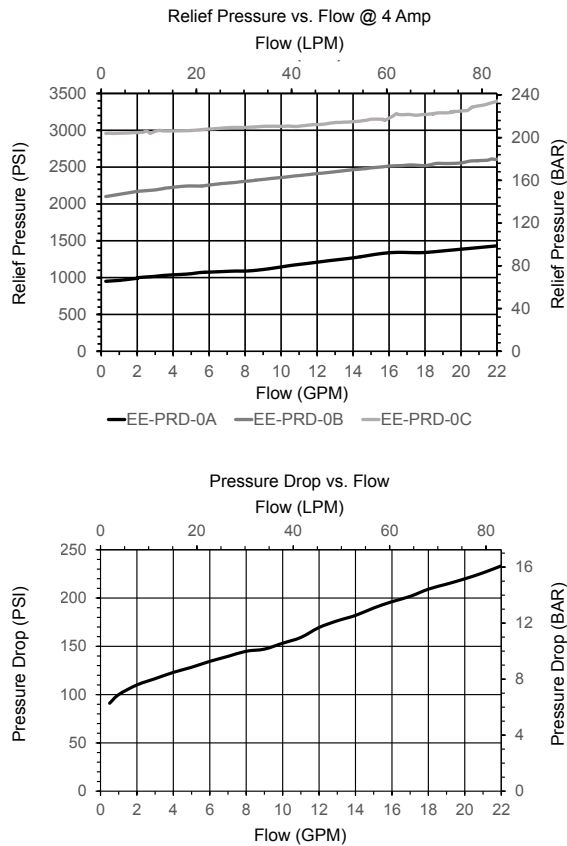


For best performance valve must be purged of air. Locate below reservoir or add check valve to return. Recommended vehicle installation is Tube Up or Horizontal after purging. Fastest purging position during bleed/start-up is with tube up. PWM frequency: 100-200 Hz (200 Hz recommended). For lower minimum or other ranges consult factory.

HYDRAULIC SYMBOL

PERFORMANCE

VALVE SPECIFICATIONS

Nominal Flow	0-20 GPM (0-76 LPM)
Operating Range	50-3000 PSI (3-207 bar)
Typical Hysteresis	5%
Viscosity Range	36 to 3000 SSU (3 to 647 cSt)
Filtration	ISO 18/16/13
Media Operating Temp. Range	-40°C to 250°F (-40°C to 120°C)
Weight	.30 lbs (.13 kg)
Operating Fluid Media	General Purpose Hydraulic Fluid
Cartridge Torque Requirements	30 ft-lbs (40.6 Nm)
Coil Nut Torque Requirements	4-6 ft-lbs (5.4-8.1 Nm)
Cavity	DELTA 2W
Cavity Tools Kit	
(form tool, reamer, tap)	40500000
Seal Kit	21191202

WARNING: the specifications/application data shown in our catalogs and data sheets are intended only as a general guide for the product described (herein). Any specific application should not be undertaken without independent study, evaluation, and testing for suitability.

DIMENSIONS

ORDERING INFORMATION

Approximate Coil Weight: .74 lbs (.33 kg)

EE-PRD - - - -
OPTIONS

Buna, 100-1200 PSI range **0A**
 Viton, 100-1200 PSI range **VA**
 Buna, 100-2175 PSI range **0B**
 Viton, 100-2175 PSI range **VB**
 Buna, 100-3000 PSI range **0C**
 Viton, 100-3000 PSI range **VC**

BODIES

Blank Without Body
N 3/8" NPT Ports
S #8 SAE Ports

VOLTAGE

06 6 VDC
12 12 VDC
24 24 VDC
36 36 VDC
48 48 VDC

"P" COIL TERMINATION

DL Double Lead
DT Deutsch on Leads DT04-2P
ML Metri-Pack on Leads
PL Packard on Leads
WL Weatherpack on Leads

SS Single Spade
DS Double Spade
HC DIN 43650 (Hirschmann)
DI Deutsch – Integral DT04-2P