

FPR-L2S PROPORTIONAL ROLLER SWITCH WITH HALL EFFECT SENSOR**FEATURES**

- Mini proportional roller switch with optimum ergonomic design for panel-mounting.
- High performance hall effect sensor circuitry.
- Twin channel configuration for redundancy.

MECHANICAL SPECIFICATIONS

Rotation angle:	$\pm 30^\circ$
Body material:	acetal resin / teflon compound
Colours available:	grey, blue, green, yellow
Rubber gaiter material:	EPDM / 35-45 shore - A
Operating temperature range:	-25°C / $+85^\circ\text{C}$
Environmental protection:	IP 68 (above panel)
Life:	> 5.000.000 cycles

ELECTRICAL SPECIFICATIONS

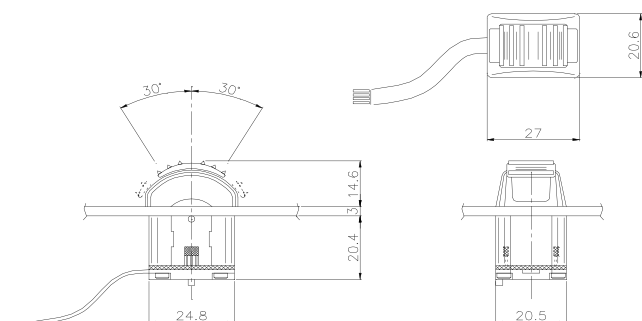
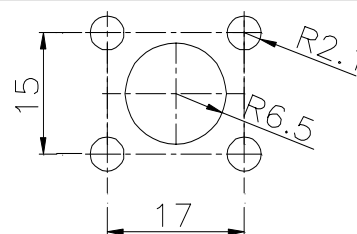
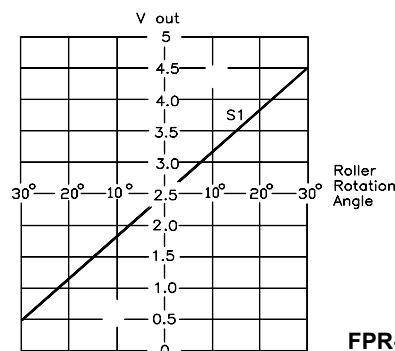
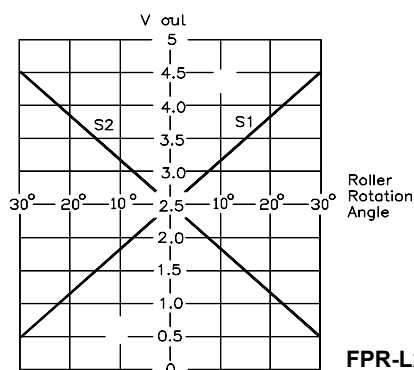
Signal output @ rest:	2.5 VDC ± 0.1 V
Supply voltage:	H - Version = $8 \div 32$ VDC 0 - Version = 5 VDC $\pm 5\%$
Full output signal range:	0.5 - 4.5 V, ± 0.2 V
Current consumption at rest:	SNCH (S1 only) 15 mA TWCH (S1/S2) 25 mA
Rated output current:	1 mA
Connection type: flying leads = coloured flat cable 100 mm connector = molex Minifit 4 poles P.N. 5559-4P Deutsch 3 poles P.N. DTO4-3P	

ELECTRICAL CONNECTIONS**FPR - L2S - SNCH (single chan.)**

- (1) Yellow: +5 VDC
- (2) Orange: (-) ground
- (3) Red: output 1 (S1)
- (4) Brown: not used

FPR - L2S - TWCH (twin chan.)

- (1) Yellow: + 5 VDC
- (2) Orange: (-) ground
- (3) Red: output 1 (S1)
- (4) Brown: output 1 (S2)

OVERALL DIMENSIONS**PANEL CUT-OUT****OUTPUT SIGNAL CONTROL CHARACTERISTIC****FPR-L2S/ SNCH (single channel)****FPR-L2S-TWCH (twin channel)****FPR ORDERING INFORMATION: see page JK7**

WARNING: the specifications/application data shown in our catalogs and data sheets are intended only as a general guide for the product described (herein). Any specific application should not be undertaken without independent study, evaluation, and testing for suitability.



4484 Boeing Drive Rockford, IL 61109 • USA • Phone +1 (815) 397-6628 • Fax +1 (815) 397-2526
mail: delta@delta-power.com • www.delta-power.com



Via Malavolti, 36 • 41122 Modena • ITALY • Phone +39 (059) 254895 • Fax +39 (059) 253512
mail: tecnord@tecnord.com • www.tecnord.com